


LEDIST OPTOELECTRONICS CO., LTD

Data sheet for L-T0805BC

Features:

- Top view type
- Viewing angle: 120 deg
- Emitting color: Blue, InGaN
- 2.00mm×1.25mm×0.80mm SMT-LED
- Lead-Free Package (According to RoHS)

Package Dimensions:

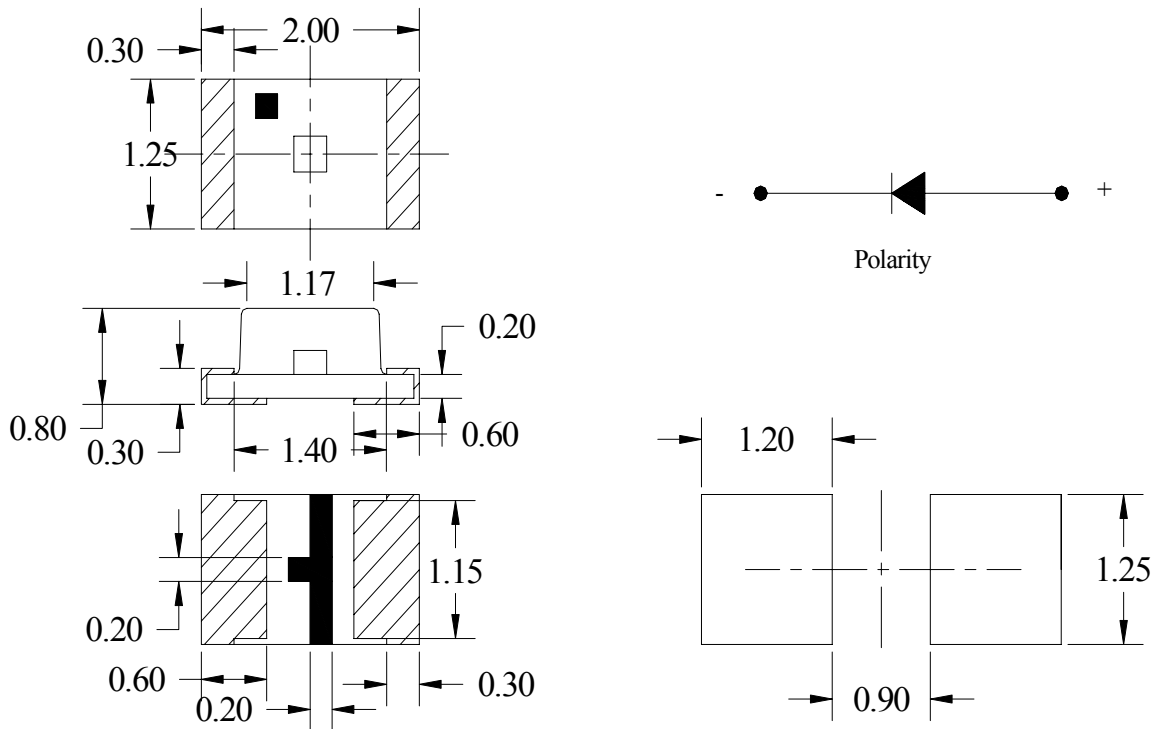

NOTES:

1. All dimensions are in millimeters (inches);
2. Tolerances are $\pm 0.2\text{mm}$ (0.008inch) unless otherwise noted.

Absolute maximum ratings at Ta = 25°C:

Parameter	Max	Unit
Power dissipation	60	mW
Forward current	25	mA
Reverse voltage	5	V
Operating temperature range	-40 ~+100 °C	Top
Storage temperature range	-40~+100 °C	Tstg
Pulse Forward Current	100	mA
Electrostatic Discharge	2000(HBM)	V

Electro-optical characteristics at Ta=25°C:

Parameter	Test Condition	Symbol	Value			Unit
			Min.	Typ.	Max.	
Forward voltage	If=20mA	Vf	--	3.2	3.6	V
Luminous intensity	If=20mA	Iv	42	100	--	mcd
Viewing angle at 50% Iv	If=20mA	2 θ 1/2	--	120	--	Deg
Reverse current	Vr=5V	Ir	--	--	10	μA
Dominant wavelenght	If=20mA	λd	460	--	475	nm

NOTE: (Tolerance: Iv ±10%, λd ±2nm, Vf ±0.05V)
IFP Conditions: Pulse Width ≦ 10msec. and Duty ≦ 1/10.

Typical optical characteristics curves:

